1 FRONT ELEVATION
1/8" = 1'-0"

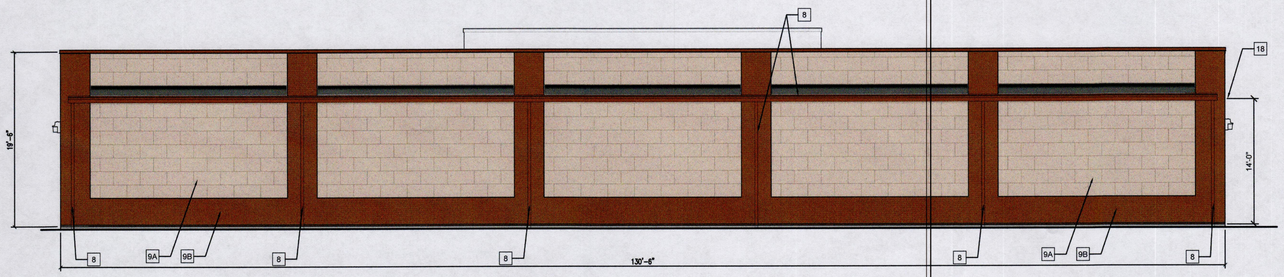

2 BACK ELEVATION
1/8" = 1'-0"

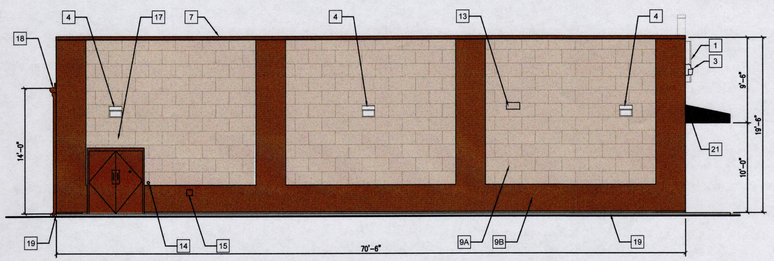

3 SIDE ELEVATION
1/8" = 1'-0"

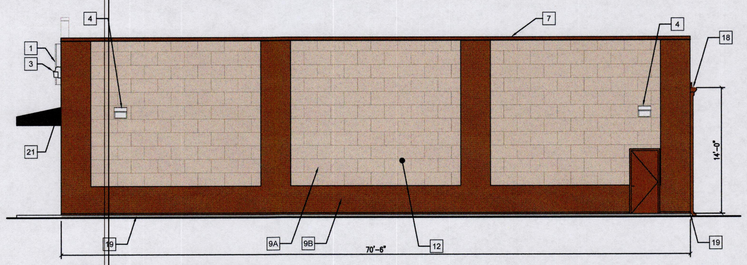

4 SIDE ELEVATION
1/8" = 1'-0"

ELEVATION KEYED NOTES

1. SIGN FURNISHED AND INSTALLED BY DOLLAR GENERAL CORP. WITH CIRCUIT AS NOTED ON ELECTRICAL PLAN. SIGN TO BE CENTERED ON FRONT OF BUILDING. CONTRACTOR IS TO PROVIDE ADEQUATE BLOCKING AS REQUIRED BY SIGN MANUFACTURER TO SUPPORT SIGN WEIGHT OF UP TO 1,400 LBS. EXTERIOR CANOPY SIGN SHALL BE SUPPORTED BY THE FACE OF THE CANOPY. COORDINATE THE PROPER SIGNAGE TO BE USED WITH DOLLAR GENERAL.
2. NOT USED
3. WALL PACK. 16'-6" A.F.F. TO TOP OF WALL PACK. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
4. WALL PACK 12'-0" A.F.F. TO TOP OF WALL PACK. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
5. WALL PACK. (ALTERNATE PARKING LIGHT) REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION. REQUIRED ONLY IF THERE IS PARKING THIS SIDE OF BUILDING.
6. RECEPTACLE. REFER TO E1 FOR ADDITIONAL INFORMATION.
7. TRIM - SEE EXTERIOR FINISH SCHEDULE FOR COLOR.
8. GUTTER AND DOWNSPOUT - SEE EXTERIOR FINISH SCHEDULE FOR COLOR.
9A. NICHIHA PANELS - SANDSTONE: GENTLE GRAY
9B. NICHIHA PANELS - VINTAGE BRICK: ALEXANDRIA BUFF
10. STANDING SEAM METAL ROOF. GALVALUME FINISH.
11. PRE-FINISHED METAL WALL PANELS, REVERSE RIB PROFILE. SEE EXTERIOR FINISH SCHEDULE FOR COLOR.
12. NOT USED
13. VENT FOR BATHROOM EXHAUST. REFER TO M01 FOR ADDITIONAL INFORMATION.
14. DOOR BUZZER. REFER TO E01 FOR ADDITIONAL INFORMATION.
15. WALL HYDRANT. REFER TO P01 FOR ADDITIONAL INFORMATION.
16. HVAC UNITS MOUNTED ON ROOF. REFER TO MECHANICAL SHEET M1 FOR MORE INFORMATION.
17. OUTSIDE AIR TEMP. SENSOR MOUNTED OVER RECEIVING DOORS @ 8'-0" A.F.F.
18. MINIMUM EAVE HEIGHT IS 14'-0" A.F.F.
19. FINISHED GRADE AT EXTERIOR WALLS SHALL BE A MINIMUM OF 6" BELOW FINISHED FLOOR AT ALL NON PAVED AREAS.
20. IN NORTHERN CLIMATES, PROVIDE SNOW GUARDS ON ROOF PER LOCAL CODE.
21. METAL CANOPY BY PRE-ENGINEERED METAL BUILDING MANUFACTURER. (ONLY APPLICABLE TO C & D PROTOTYPES)

9A-NICHIHA PANEL
SANDSTONE
DESERT BEIGE

9B-NICHIHA PANEL
PLYMOUTH BRICK
CRIMSON

Robert E. Walker, IV
Architect

2229 FIRST AVE. SOUTH
SUITE 110
BIRMINGHAM, Alabama
35233
T-205.254.3212
F-205.254.3269

DOLLAR GENERAL BUILDING

Grove City, OH
Franklin County

PROJECT NO.: 8006.582
ISSUED: 10/09/14

EXTERIOR ELEVATIONS

A3