

Grove City Public Service Department

Enhancing and Improving Your Community.



Wash gravel and return to the curb can (or replace with new gravel of same size).



Replace the protective cap.


Please contact the Grove City Public Service Department 614-277-1100 with questions.



Grove City Public Service Department
614-277-1100
3262 Ventura Blvd.
Grove City, OH 43123
Monday-Friday, 7a.m.-4p.m.



Curb Can Cleanout

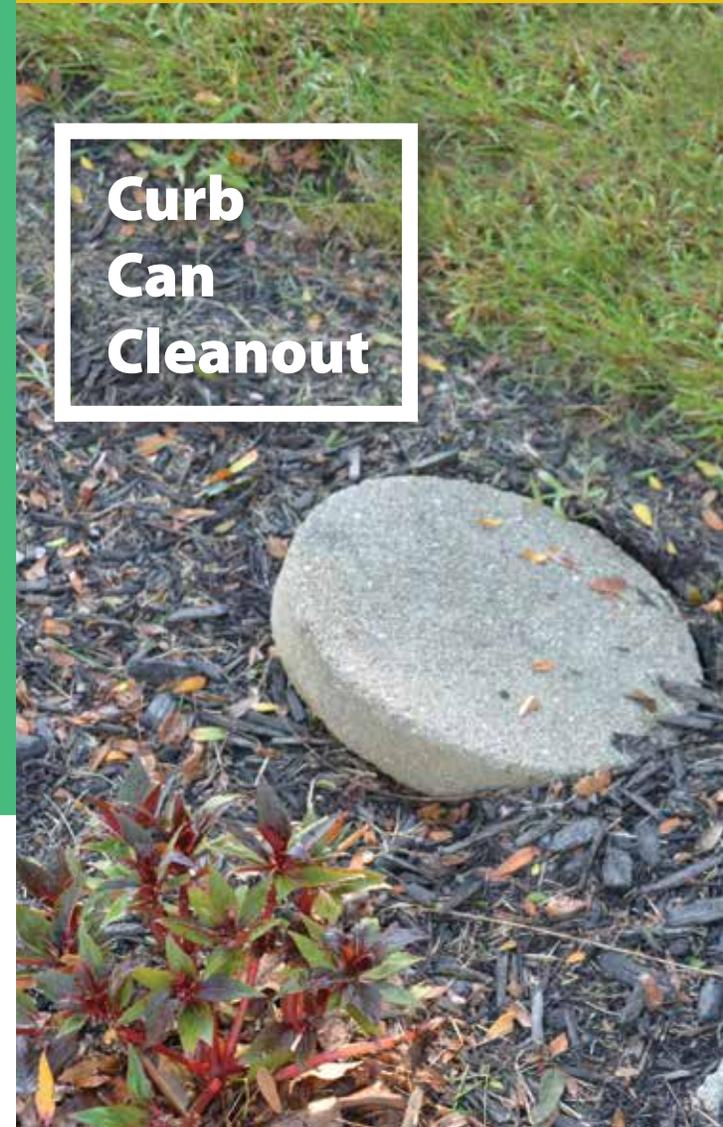

Important Cleaning Procedures for Roof Drain Junction Box (Curb Can)

Most Grove City homes built after 1990 employ curb cans to filter sump pump and downspout rainwater before it is diverted to the City's storm drainage system. In most cases there are two curb cans per household, one located on each side of the house, near the street curb.

If you are unable to determine if your home has curb cans, check the street curb for cored holes. If no holes exist, look for a protective round or square cap in the right-of-way, near the curb. This cap is sometimes covered by grass if not regularly maintained.

It is the homeowner's responsibility to locate each curb can and remove debris. This procedure should be performed twice each year on each curb can to help reduce the risk of basement flooding and/or standing water at the curb.



Remove the protective cap (concrete paver stone).



Remove the layer of gravel by hand or garden spade to expose perforated under-drain.



Remove debris (dirt, shingle grit, leaves, etc.).



Perforated under-drain may be located within 6-18" of the surface.



Locate gravel.

Once gravel is removed and the perforated under-drain is located, flush with water to verify proper drainage. If it does not drain properly, contact our office.