



SECTION A-A


PLAN-SLEEVE ASSEMBLY

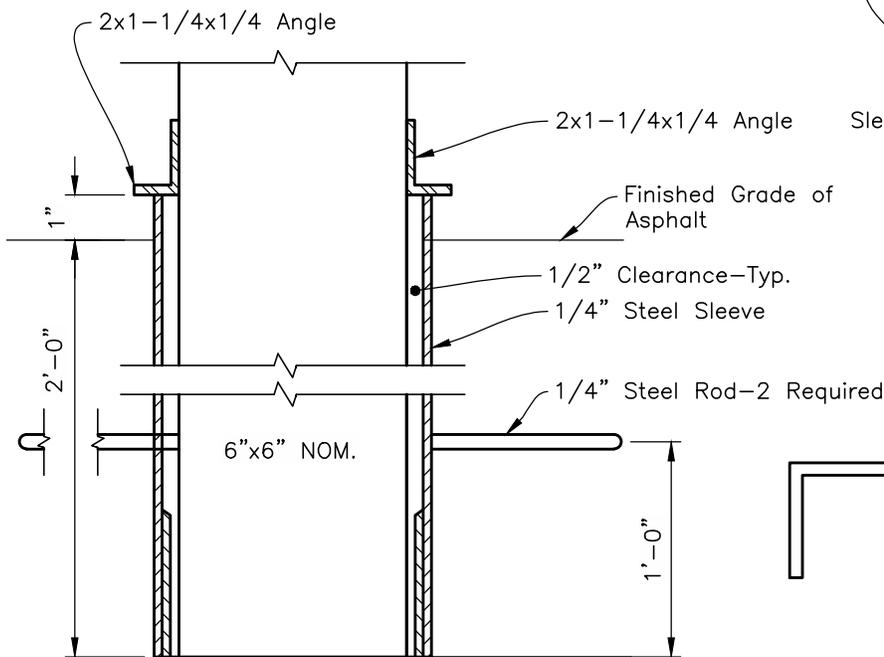



SECTION B-B

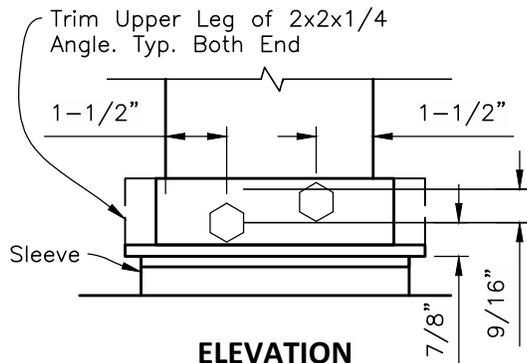

ELEVATION

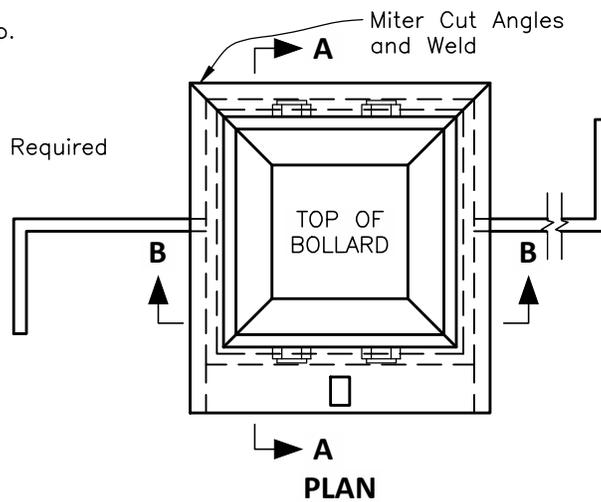

PLAN

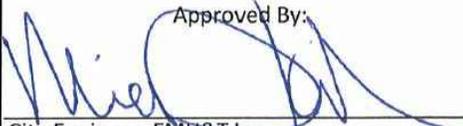
Approved By:

 City Engineer, EMH&T Inc

 City Service Director

STANDARD DIMENSIONS
 FOR
**REMOVABLE
 BOLLARD DETAIL**


**CITY OF
 GROVE CITY, OHIO**

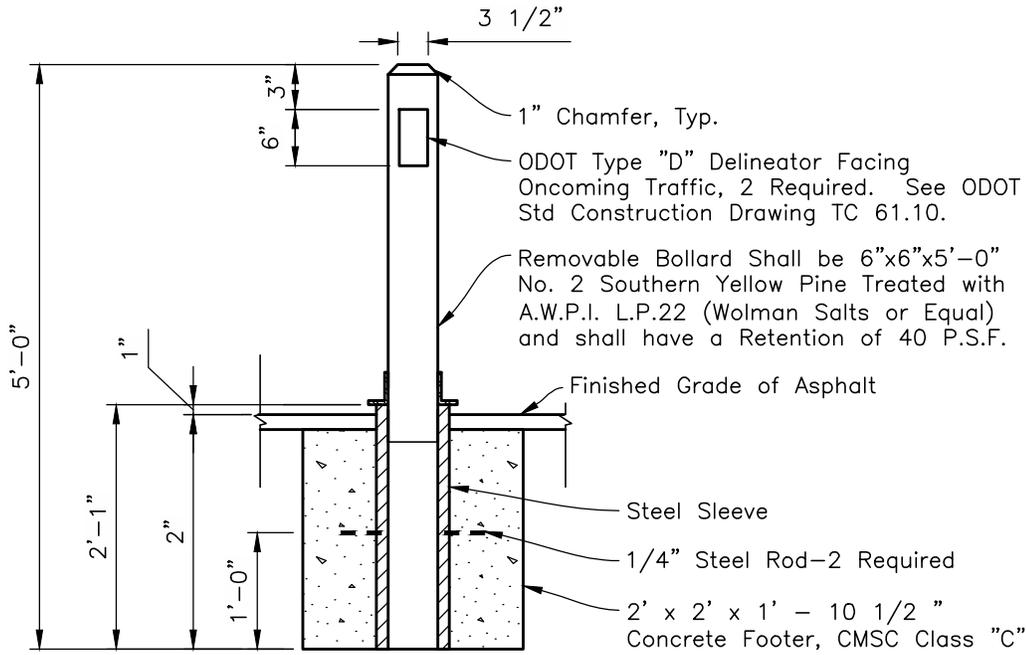STANDARD
 CONSTRUCTION DRAWING

Revised	Sheet	Drawing No.
Rev February 2016	1/2	C-GC-82



REMOVABLE BOLLARD

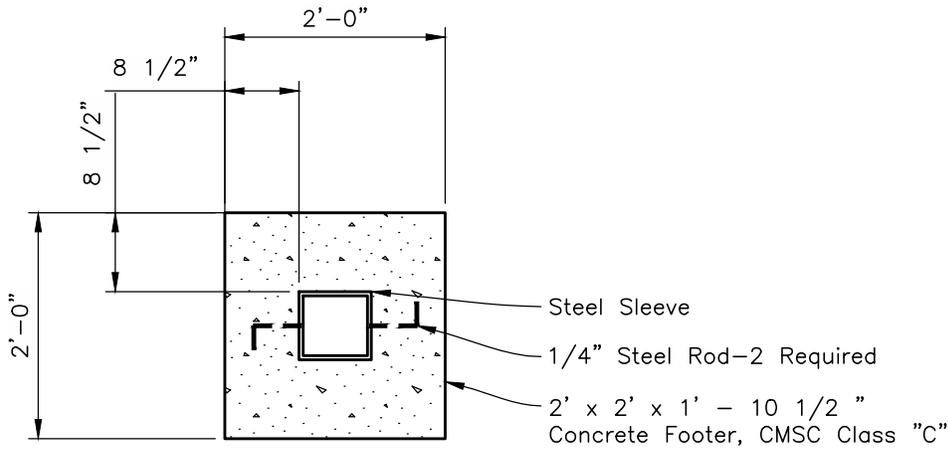

FOOTER DETAIL

NOTES

The steel sleeve, angle iron and anchor rods shall be painted with two coats of Rust-Oleum No. 769 Damp-Proof Red Primer, or Equal, prior to installation.
The Contractor may substitute a 24" circular footer in place of the 24" square footer shown.

Approved By:
[Signature]
City Engineer, EMH&T Inc

[Signature]
Cindi Fitzpatrick
City Service Director

STANDARD DIMENSIONS
FOR
**REMOVABLE
BOLLARD DETAIL**

**CITY OF
GROVE CITY, OHIO**

STANDARD
CONSTRUCTION DRAWING

Revised	Sheet	Drawing No.
February 2016	2/2	C-GC-82