


SECTION A-A

NOTES:

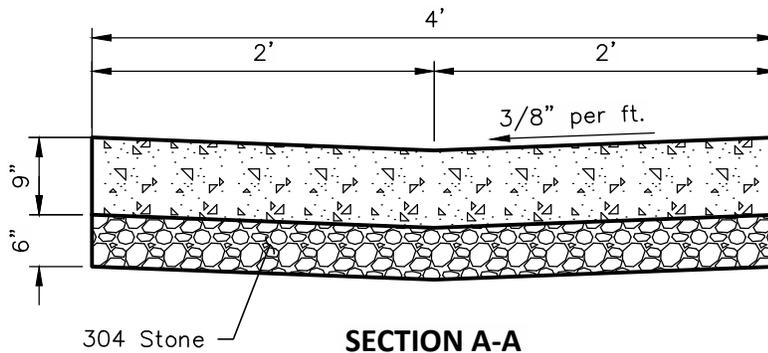
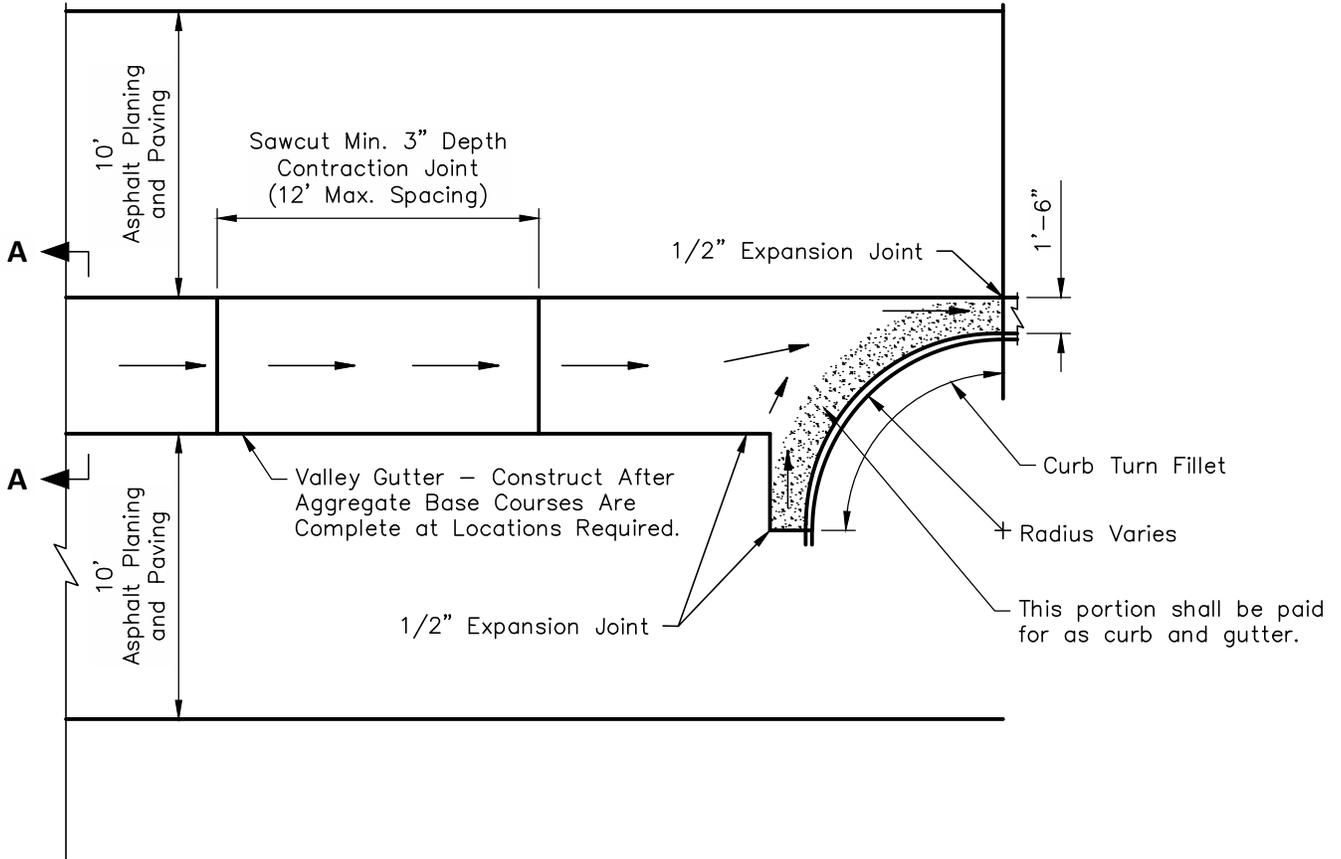
1. All maintenance of traffic shall be done in accordance with the Ohio Manual of Traffic Control for Construction and Maintenance Operations.
2. Columbus class "S" or "MS" concrete with fiber reinforcement and 6%±1% air entrainment shall be used.

Approved By:

 City Engineer, EMH&T Inc

 City Service Director

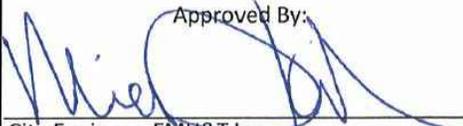
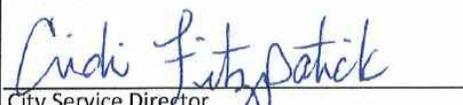
STANDARD DIMENSIONS
 FOR
**9" CONCRETE VALLEY
 GUTTER**

CITY OF GROVE CITY, OHIO		
STANDARD CONSTRUCTION DRAWING		
Revised	Sheet	Drawing No.
Rev February 2016	1/2	C-GC-86



NOTES:

1. All maintenance of traffic shall be done in accordance with the Ohio Manual of Traffic Control for Construction and Maintenance Operations.
2. Columbus class "S" or "MS" concrete with fiber and 6%±1% air entrainment shall be used.
3. The Contractor shall be limited to a 48-hour road closure. All maintenance of traffic shall be done in accordance with the "Ohio Manual of Traffic Control for Construction and Maintenance Operations".

Approved By:

 City Engineer, EMH&T Inc

 City Service Director

STANDARD DIMENSIONS
 FOR
**9" CONCRETE VALLEY
 GUTTER**

CITY OF GROVE CITY, OHIO		
STANDARD CONSTRUCTION DRAWING		
Revised	Sheet	Drawing No.
Rev February 2016	2/2	C-GC-86