



**EXPANSION JOINT DETAIL FOR PAVEMENT SECTIONS WITH  
 $\text{C}$  RADII TO 500' & DELTAS ( $\Delta$ ) GREATER THAN 50°**

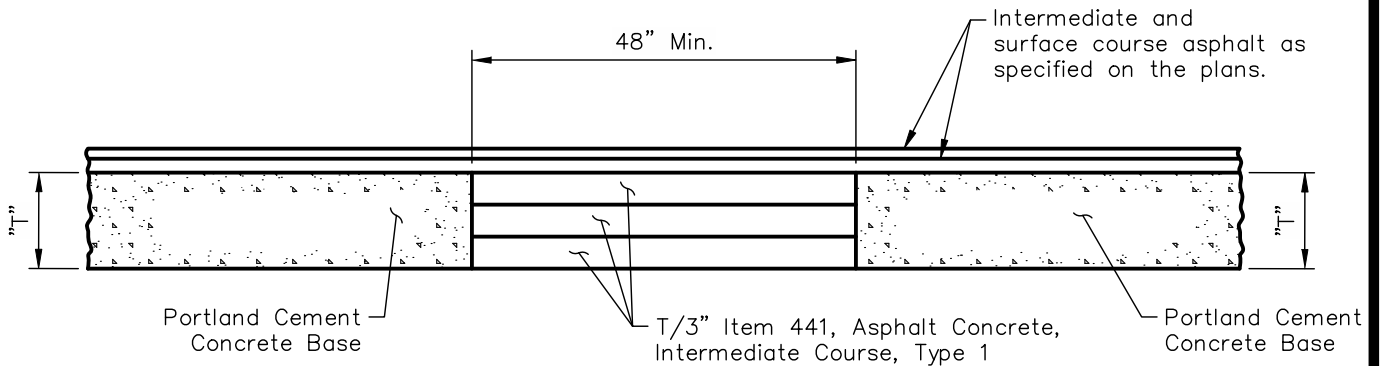

**SECTION A-A FOR CONCRETE BASE PAVEMENT**

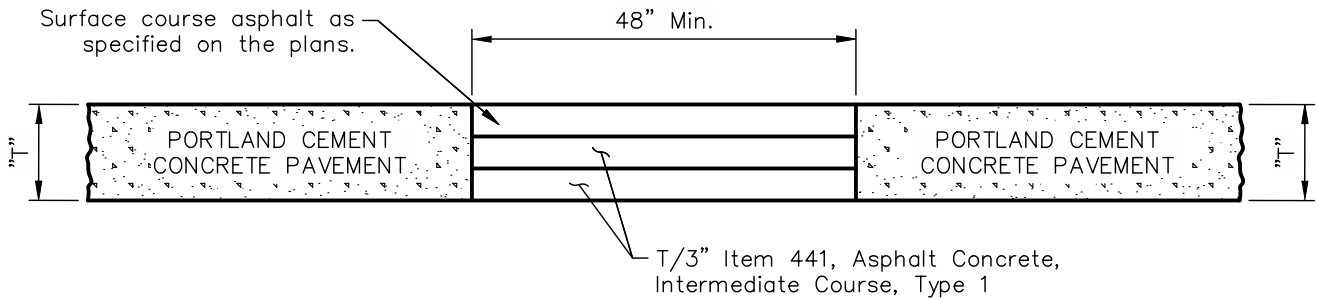

**SECTION A-A FOR CONCRETE PAVEMENT**

**NOTES:**

- 2" expansion material shall be placed at the P.C. and P.T. in the concrete curb.
- Maximum spacing of 500' between joints on straight sections of pavement without curves.

Approved By:  
  
 City Engineer, EMH&T Inc  
  
 City Service Director

STANDARD DIMENSIONS  
 FOR  
**EXPANSION JOINT DETAIL AT  
 CURVE POINTS**

**CITY OF  
 GROVE CITY, OHIO**

---

STANDARD  
 CONSTRUCTION DRAWING

|               |  |             |
|---------------|--|-------------|
| Revised       |  | Drawing No. |
| February 2019 |  | C-GC-59     |