


**PLAN VIEW**

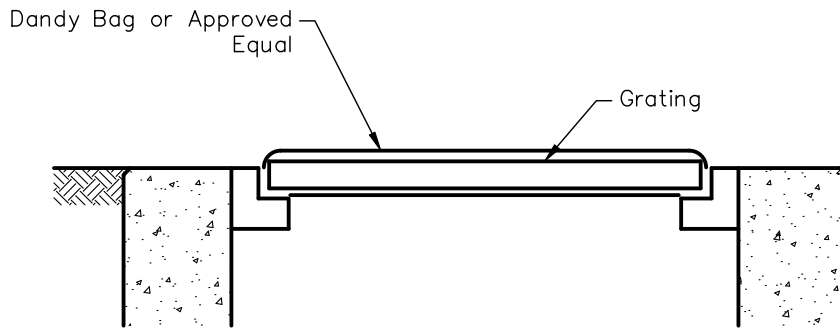

**SECTION A-A**

**INSTALLATION:**

Stand grate on end. Place Dandy Bag over grate. Flip grate over so that open end is up. Pull up slack. Tuck flap in. Be sure end of grate is completely covered by flap or Dandy Bag will not fit properly. Holding handles, carefully place Dandy Bag with grate inserted into Catch Basin frame.

**MAINTENANCE:**

After silt has dried, remove it from the surface of Dandy Bag with broom.

Approved By:  
  
 City Engineer, EMH&T Inc  
  
 City Service Director

STANDARD DIMENSIONS  
 FOR  
**THE DANDY BAG  
 OR EQUIVALENT**

**CITY OF  
 GROVE CITY, OHIO**

STANDARD  
 CONSTRUCTION DRAWING

Revised  
 October 2015

Drawing No.  
**C-GC-71A**